

# ORWAK 3300

The low-built Orwak 3300 is perfect for locations with low ceiling height! It is easy to take into operation, as it has the same dimensions on delivery as for installation. The digital display always gives you guidance and a status update!



---

## **MORE PRODUCTIVE USE OF TIME**

Less time spent on waste handling, more time devoted to your core activities.

---

## **VOLUME REDUCTION**

More compaction = less waste volume to transport for recycling or disposal. Fewer transports required results in lower transportation costs and reduced CO<sub>2</sub> emissions.

---

## **MORE SPACE**

Our baler rapidly minimizes the space the waste takes up, keeping aisles and passageways free and tidy.



# ORWAK 3300

## Low height

### LOW-BUILT

The installation height is only 1980 mm! Low height means easy installation and no need for reassembly.

### EASY TO USE

3300 is easy to relocate only using a pallet truck. Different types of materials, such as paper or plastics, are easily loaded and compacted.



### ORWAK 3300 IS OPTIMIZED FOR:

#### PAPER

- + Cardboard
- + Shredded
- + Paper sacks

#### PLASTIC FOIL

- + Shrink film
- + Plastic bags



### DIGITAL DISPLAY FOR USER-FRIENDLINESS

The control panel on the digital display provides a status update and guidance in operating the machine! The display indicates when it is time to bale.


### HP AND LP MODE

Equipped with a switch for high and low pressure.

## DIMENSIONS AND SPECIFICATIONS

Dimensions				
A	B	C	D	E
1980 mm	1722 mm	1070 mm	2205 mm	971 mm

Energy consumption	
STANDBY MODE	MAXIMUM OPERATION ONE HOUR
2.7 W / H	626 W / H

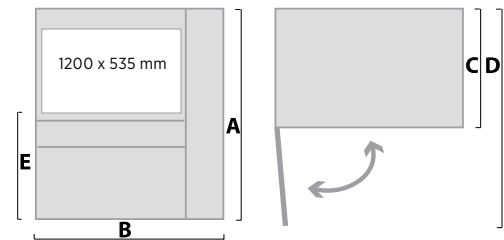

WEIGHT (MACHINE) TOTAL: 1350 KG

Technical specifications							
LOADING APERTURE	CYCLE TIME	PRESS FORCE	BALE SIZE	BALE WEIGHT	NOISE LEVEL	PROTECTION CLASS	OPERATING POWER
Width: 1200 mm Depth: 535 mm	25 secs	18,5 ton, 185 kN	Width: 1200 mm Depth: 700 mm Height: 865 mm	Cardboard: Up to 200 kg Plastic: Up to 250 kg	72 db (A)	IP 55	3-phase 3x400 V, 50 Hz



### TOMRA Compaction AB

Box 58, SE-576 22 Sävsjö, Sweden  
Tel: +46 382-157 00  
Fax: +46 382-106 07  
E-mail: info.compaction@tomra.com  
[www.tomracompaction.com](http://www.tomracompaction.com)

*We reserve the right to make changes to specifications without prior notice.  
Bale/bag/bin weights are dependent upon material type.*